


ROLL RITE TARP ORDERING FORM
 Please fill form fully.

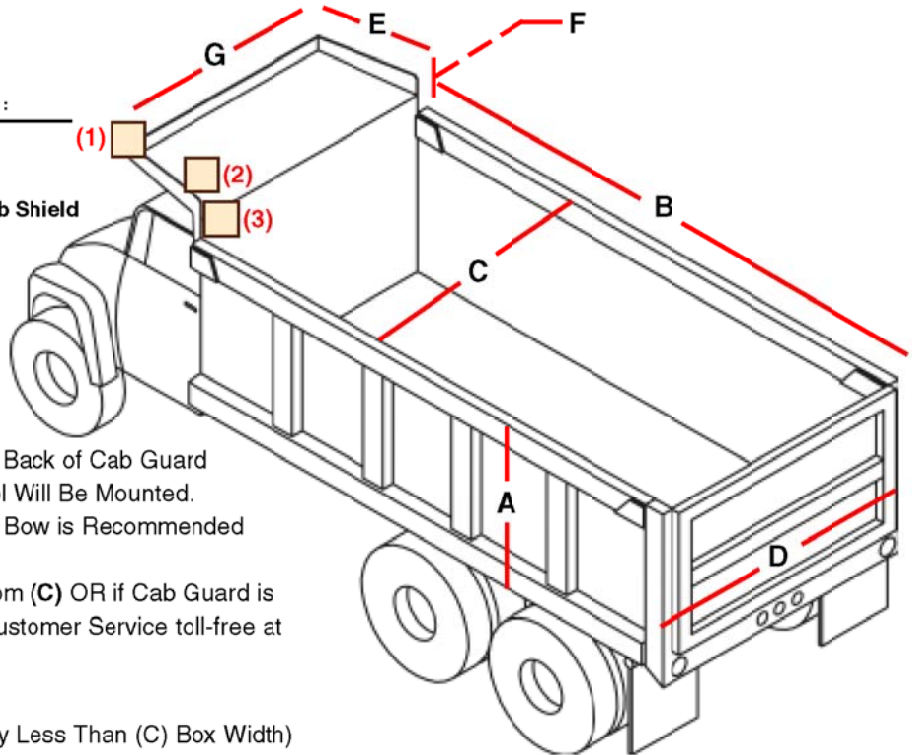

Spool Position: — See Below for Trailer Mounted Spool Position :

Check One Box To Show Mounted Spool Position :

- (1) Front of Cab Shield
- (2) Rear Positioned on Top of Cab Shield
- (3) Forward Positioned on Box Top/Behind Cab Shield

Box: _____ " (A) Height
 _____ " (B) Length
 _____ " (C) Width (inside)
 _____ " (D) Outside Width of Widest Point
 —If Tailgate is Over 100"

Cab Shield: _____ " (E) Length —OR— Distance From Back of Cab Guard to Where Spool Will Be Mounted.
 _____ " (F) Rise: —If 8" or More, Tension Bow is Recommended
 _____ " (G) Front Width
 **If Width Varies Considerably from (C) OR if Cab Guard is Tapered, Please Call Roll-Rite Customer Service toll-free at 1-800-297-9905

Tarp Size: _____ " Width (Generally Should Be Slightly Less Than (C) Box Width)


(Required) _____ " Length = _____ + _____ + _____ + 2'
 (B) (E) (F)

Tarp Length Required to Determine Your System's Pivot Spring Capacity, See p. 6-7 for Guidelines.

Specify Roll-Rite® Tarp Fabric & Design by Part Number: (see p. 15)

Please Note: All Solid Tarp Fabrics Should Be Tied Down. See p. 14
 To ensure accuracy, orders for custom tarps (flapped, etc.) must be accompanied by an approved drawing. Purchasers will be responsible for misorders on custom tarps (see Custom Order Policy, p. 27)

For Trailer Mounted Spool Position: Check One Box
 (4) Forward of Trailer
 (5) Top of Trailer

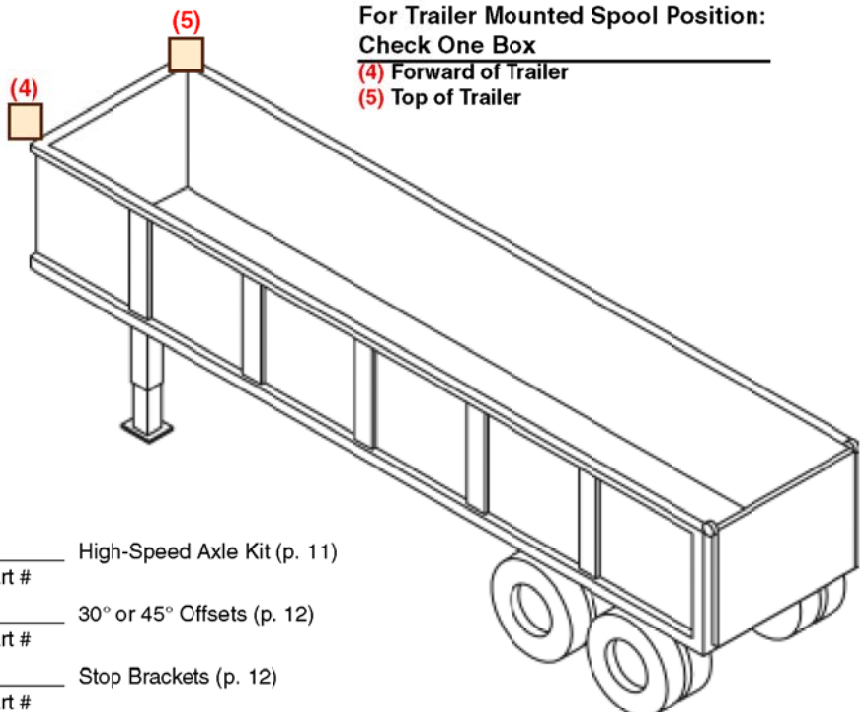

System: **1. Select a Pivot Set: see p. 8**

Part # _____

2. Select a Tarp Spool: see p. 10

Part # _____

3. Select a Bow Set: see p. 12

Part # _____

Options/Recommendations:

Part # _____ Tension Bow (p. 12)

Part # _____ Hydraulic Units (p. 17)

Part # _____ Bow Centering Wedges (p. 12)

Part # _____ High-Speed Axle Kit (p. 11)

Part # _____ 30° or 45° Offsets (p. 12)

Part # _____ Stop Brackets (p. 12)