

## ALL PRODUCTS MEET OR EXCEED 2014 PASE/ASME STANDARDS



MODEL Number	CAPACITY	MIN HEIGHT	MAX HEIGHT	SADDLE DIAMETER	HANDLE Length	LENGTH	WIDTH	HEIGHT	WEIGHT LBS
53300	3 Ton	4-3/4"	18-1/8"	4-1/4"	44"	24-3/4"	13-5/8"	6-1/4"	69
53350	3.5 Ton	5-1/8"	21"	4-1/4"	48-1/2"	28-3/4"	14-3/8"	6-1/4"	92



MODEL Number	CAPACITY	MIN HEIGHT	MAX HEIGHT	REACH	LENGTH	WIDTH	HEIGHT	WEIGHT LBS
56220	22 Ton	8-1/4"	17-3/4"	61"	24"	14-1/2"	10-1/2"	98

## **SINCE 1969,** THE VIKING SERIES BY AFF HAS BECOME SYNONYMOUS WITH VALUE AND PERFORMANCE!

54200

Safety bypass system prevents accidental overload

External return springs accelerate ram retraction for maximum productivity



Effortless air operation reduces user fatigue

Aluminum air motor design delivers fast, consistent, and reliable operation

Fully welded construction provides maximum strength and leak free operation

MODEL Number	CAPACITY	AIR FITTING	MIN HEIGHT	MAX HEIGHT	LENGTH	WIDTH	HEIGHT	WEIGHT LBS
54200	20 Ton	1/4" NPT	10-1/4"	19-3/4"	6"	5"	10-1/4"	37



Large saddle allows better contact with the load and improves safety

Ratchet bar is made from ductile iron for

dependable strength and toughness

Wide pyramid base design provides added support and security


55060

Multi-position ratchet bar instantly locks into place during adjustment

High-grade forged steel and welded frame design for maximum durability

MODEL Number	CAPACITY	MAX HEIGHT	WIDTH	LENGTH	HEIGHT	TOTAL WEIGHT LBS
55040	4 Ton	21"	8-7/16"	7-1/16"	14"	20
55060	6 Ton	24-3/8"	11"	9-3/4"	15-3/4"	32
55220	22 Ton	19-11/16"	9-7/8"	9-7/8"	13-5/16"	64



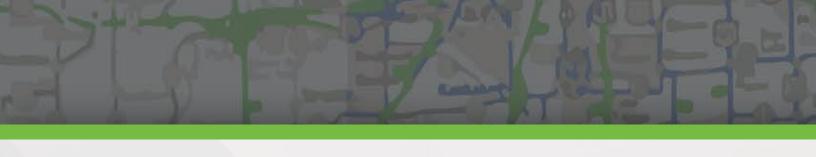

300 Corporate Drive Elgin, IL 60123

Phone: 800-323-7402 Fax: 847-717-8419

orders.usa@surewerx.com affjaxx.com surewerx.com/usa







